


JIS 5K

Screwed Air Vent

Fig. 9701

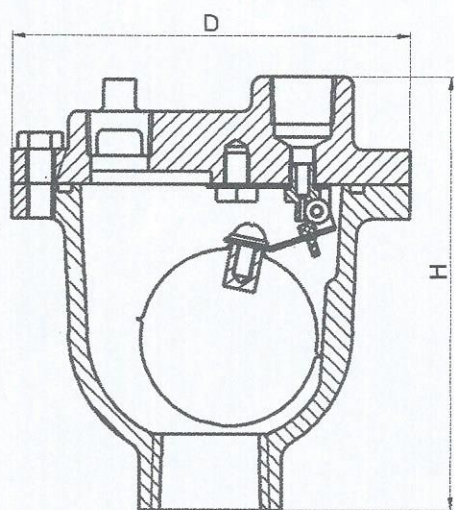

## Pressure Temperature Ratings

|                     |                |
|---------------------|----------------|
| Working pressure    | 5bar           |
| Working Temperature | -10°C to 100°C |

## Material Specification

| Part           | Material            | ASTM Spec.    |
|----------------|---------------------|---------------|
| Body           | Cast Iron           | A126 Class B  |
|                | Ductile Iron        | A536 65-45-12 |
| Cover          | Cast Iron           | A126 Class B  |
|                | Ductile Iron        | A536 65-45-12 |
| Level          | Stainless Steel 304 | S30400        |
| Seat Ring      | Stainless Steel 304 | S30400        |
| Float          | Stainless Steel 304 | S30400        |
| Float Arm      | Stainless Steel 304 | S30400        |
| Orifice Button | Viton               | Commercial    |

## Dimensions

| mm | DN   | Inlet | Outle | Orifice | D   | H   |
|----|------|-------|-------|---------|-----|-----|
|    | inch |       |       |         |     |     |
| 15 | 1/2  | 15    | 15    | 1.6     | 125 | 137 |
| 20 | 3/4  | 20    | 15    | 1.6     | 125 | 137 |
| 25 | 1    | 25    | 15    | 1.6     | 125 | 137 |